



PAHANG PIPE FITTINGS



PAHANG PIPE FITTINGS:

PPF is one of the leading manufacturers of Welded Carbon Steel Pipes.

Our highly specialized product range is capable of catering the requirements of Oil & Gas, Water lines, Petro Chemical lines, Construction and many other Carbon Steel applications.

PPF is having a highly sophisticated and a fully mechanized production unit with a mass production facility for size ranges upto 24".

The list of approvals by different governmental agencies underlines our quality and product reliability. Pahang's stringent quality control methods, continuous R&D works and excellent team of staff helps us to maintain the globally reputed quality.

We also add a new line for spiral pipes from the sizes 16" upto 54, according to international standards. PPF stands for development and manufacture of complete machinery of spiral welded steel pipes (SAW) factory. The high quality pipes manufactured by our equipments are used for gas, petrol and water pipeline.



PPF ERW PIPES

Black/ Galvanized Carbon Steel Pipes to standards ASTM A53 AND API 5L

Normal Size	Outside Diameter		Wall Thickness		Class	Sched No.	Plain End									
							Normal Weight			Test Pressure min.						
										Butt Welded		Grade A		Grade B		
in	in	mm	in	mm			1b/ft	kg/ft.	kg/m	psi	kg/ cm ²	psi	kg/cm ²	psi	kg/ cm ²	
½	.840	21.3	.109	2.8	std.	40	.85	.39	1.26	700	49.2	700	49.2	700	49.2	
			.147	3.7	xs	80	1.09	.49	1.62	850	59.8	850	59.8	850	59.8	
			.294	7.5	xxs		1.71	.78	2.54	1000	70.3	1000	70.3	1000	70.3	
¾	1.050	26.7	.113	2.9	std.	40	1.13	.51	1.68	700	49.2	700	49.2	700	49.2	
			.154	3.9	xs	80	1.47	.67	2.19	8850	59.8	850	59.8	850	59.8	
			.308	7.8	xxs		2.44	1.11	3.63	1000	70.3	1000	70.3	1000	70.3	
1	1.315	33.4	.133	3.4	std.	40	1.68	.76	2.50	700	49.2	700	49.2	700	49.2	
			.179	4.5	xs	80	2.17	.98	3.23	850	59.8	850	59.8	850	59.8	
			.358	9.1	xxs		3.66	1.66	5.45	1000	70.3	1000	70.3	1000	70.3	
1¼	1.660	42.2	.140	3.6	std.	40	2.27	1.03	3.38	1000	70.3	1000	70.3	1100	77.3	
			.191	4.9	xs	80	3.00	1.36	4.46	1300	91.4	1500	105.5	1600	112.5	
			.382	9.7	xxs		5.21	2.36	7.75	1400	98.4	1800	126.6	1900	133.6	
1½	1.990	48.3	.145	3.7	std.	40	2.72	1.23	4.05	1000	70.3	1000	703	1100	77.3	
			.200	5.1	xs	80	3.36	1.65	5.40	1300	91.4	1500	105.5	1600	112.5	
			.400	10.2	xxs		6.41	2.91	9.54	1400	98.4	1800	126.6	1900	133.6	
2	2.375	60.3	.154	3.9	std.	40	3.65	1.66	5.43	1000	70.3	2300	161.7	2500	175.8	
			.218	5.5	xs	80	5.02	2.28	7.47	1300	91.4	2500	175.8	2500	175.8	
			.344	8.7		160	7.46	3.38	11.10			2500	175.8	2500	175.8	
			.436	11.1	xxs		9.03	4.10	13.44	1400	98.4	2500	175.8	2500	175.8	
2½	2.875	73.0	.203	5.2	std.	40	5.79	2.63	8.62	1000	70.3	2500	175.8	2500	175.8	
			.276	7.0	xs	80	7.66	3.47	11.40	1300	91.4	2500	175.8	2500	175.8	
			.375	9.5		160	10.01	4.54	14.90	1400	98.4	2500	175.8	2500	175.8	
			.552	14.0	xxs		13.70	6.21	20.39	1400	98.4	2500	175.8	2500	175.8	
3	3.500	88.9	.188	4.8			6.63	3.01	9.87	1000	70.3					
			.216	5.5	std.	40	7.58	3.44	11.28	1000	70.3	2200	154.7	2500	175.8	
			.300	7.6	xs	80	10.25	4.65	15.25	1300	91.4	2500	175.8	2500	175.8	
			.438	11.1		160	14.31	6.49	21.30			2500	175.8	2500	175.8	
			.600	15.2	xxs		18.58	8.43	27.65			2500	175.8	2500	175.8	
3½	4.000	101.6	.188	4.8			7.63	3.46	11.35	1200	84.4					
			.226	5.7	std	40	9.11	4.13	13.56	1200	84.4	2000	140.6	2400	168.7	
			.318	8.1	xs		12.51	5.67	18.62	1700	199.5	2800	196.9	2800	196.9	
4	4.500	114.3	.156	4.0			7.25	3.29	10.79	1000	70.3					
			.188	4.8			8.64	3.92	12.86	1200	84.4					
			.219	5.6	std	40	10.00	4.54	14.88	1200	84.4					
			.237	6.0	xs	40	10.79	4.89	16.06	1200	84.4	1900	133.6	2200	154.7	
			.337	8.6		80	14.98	6.79	22.29	1700	119.5	2700	189.8	2800	196.9	
			.438	11.1		120	18.98	8.61	28.25			2800	196.9	2800	196.9	
			.531	13.5		160	22.52	10.21	33.51			2800	196.9	2800	196.9	
			.674	17.1	xxs		27.54	12.49	40.98			2800	196.9	2800	196.9	
5	5.563	141.3	.258	6.6	std	40	14.62	6.63	21.76			1700	119.5	1900	133.6	
			.375	9.5	xs	80	20.78	9.43	30.92			2400	168.7	2800	196.9	
			.500	12.7	...	120	27.04	12.27	40.24			2800	196.9	2800	196.9	
			.625	15.9		160	32.96	14.95	49.95			2800	196.9	2800	196.9	
			.750	19.9	xxs		38.55	17.49	57.37			2800	196.9	2800	196.9	
6	6.625	168.3	.280	7.1	std	40	18.97	8.60	28.23			1500	105.5	1800	126.6	
			.432	11.0	xs	80	28.57	12.96	42.52			2300	161.7	2700	189.8	
			.562	14.3		120	36.42	16.52	54.20			2800	196.9	2800	196.9	
			.719	18.3		160	45.34	20.57	67.47			2800	196.9	2800	196.9	
			.864	21.9	xxs		53.16	24.11	79.11			2800	196.9	2800	196.9	
8	8.625	219.1	.250	6.4	...	20	22.36	10.14	33.28			1000	70.3	1200	84.4	
			.277	7.0	...	30	24.70	11.20	36.76			1200	84.4	1300	91.4	
			.322	8.2	std	40	28.55	12.95	42.49			1300	91.4	1600	112.5	
			.406	10.3	...	60	35.66	16.18	53.07			1700	119.5	2000	140.6	
			.500	12.7	xs	80	43.39	19.68	64.57			2100	147.7	2400	168.7	
			.594	15.1	...	100	50.93	23.10	75.79			2600	175.8	2800	196.9	
			.719	18.3	...	120	60.59	27.53	90.32			2800	196.9	2800	196.9	
			.812	20.6	...	140	67.79	30.75	100.88			2800	196.9	2800	196.9	
			.875	22.2	xxs		72.42	32.85	107.77			2800	196.9	2800	196.9	
			.906	23.0	...	160	74.71	33.89	111.18			2800	196.9	2800	196.9	

PPF ERW PIPES

Black/ Galvanized Carbon Steel Pipes to standards ASTM A53 AND API 5L

Normal Size	Outside Diameter		Wall Thickness		Class	Sched No.	Plain End							
							Normal Weight			Test Pressure min.				
										Butt Welded		Grade A		Grade B
in	in	mm	in	mm			1b/ft	kg/ft.	kg/m	psi	kg/cm ²	psi	kg/cm ²	psi
10	10.750	273.0	.250	6.4		20	28.04	12.72	41.73			850	59.8	1000
			.379	7.1		30	31.20	14.15	46.43			950	66.8	1100
			.307	7.8			34.24	15.53	50.95			1000	70.3	1200
			.365	9.3	std	40	40.48	18.36	60.24			1200	84.4	1400
			.500	12.7	xs	80	54.74	24.83	81.46			1700	119.5	2000
			.594	15.1		100	64.46	29.21	95.84			2000	140.6	2300
			.719	18.3		120	77.00	34.83	114.59			2400	168.7	2800
			.844	21.4		140	89.27	40.49	132.85			2800	196.9	2800
			1.000	25.4	xxs		104.13	47.23	154.96			2800	196.9	2800
			1.125	28.6		160	115.05	52.46	172.11			2800	196.9	2800
12	12.750	323.8	.250	6.4		20	33.38	15.14	49.67			700	49.2	800
			.330	8.4		30	43.77	19.85	55.14			950	66.8	1100
			.375	9.5	std		49.56	22.48	73.75			1100	77.3	1200
			.406	10.3		40	53.56	24.29	79.71			1100	77.3	1300
			.500	12.7	xs		65.42	29.67	97.36			1400	98.4	1600
			.562	14.3		60	73.22	33.21	108.96			1600	112.5	1900
			.688	17.5		80	88.57	40.17	131.81			1900	133.6	2300
			.844	21.4		100	107.29	48.67	159.66			2400	168.7	2800
			1.0000	25.4	xxs	120	125.49	56.92	186.75			2800	196.9	2800
			1.125	28.6		140	139.68	63.36	207.87			2800	196.9	2800
			1.312	33.3		160	160.33	72.72	238.60			2800	196.9	2800
14	14.000	355.6	.250	6.4		10	36.71	16.65	54.63			650	45.7	750
			.312	7.9		20	45.68	20.72	67.98			800	56.2	950
			.375	9.5	std	30	54.57	24.75	81.21			950	66.8	1100
			.438	11.1		40	63.37	28.74	94.30			1100	77.3	1300
			.500	12.7	xs		72.09	32.70	107.28			1300	91.4	1300
			.594	15.1		60	85.01	38.56	126.51			1500	105.5	1500
			.750	19.0		80	106.13	48.14	157.94			1900	133.6	2800
			.938	23.8		100	130.79	59.33	194.64			2400	168.7	2800
			1.094	27.8		120	150.76	68.38	224.36			2800	196.9	2800
			1.250	31.8		140	170.22	77.21	253.31			2800	196.9	2800
			1.406	35.7		160	189.15	85.80	281.49			2800	196.9	2800
16	16.000	406.4	.250	6.4		10	42.05	19.07	62.58			550	38.7	650
			.312	7.9		20	52.36	23.75	77.92			700	49.2	800
			.375	9.5	std	30	62.58	28.39	93.13			850	59.8	1000
			.500	12.7	xs	40	82.77	37.54	123.18			1100	77.3	1300
			.656	16.7		60	107.54	48.78	160.04			1500	105.5	1700
			.844	21.4		80	136.58	61.95	203.25			1900	133.6	2200
			1.031	26.2		100	164.86	74.78	245.34			2300	161.7	2700
			1.219	31.0		120	192.40	82.27	286.32			2700	189.8	2800
			1.438	36.5		140	223.57	101.41	332.71			2800	196.9	2800
			1.594	40.5		160	245.22	111.23	364.93			2800	196.9	2800
18	18.000	457.2	.250	6.4		10	47.39	21.50	70.53			500	35.2	600
			.312	7.9		20	59.03	26.28	87.85			600	42.2	750
			.275	9.5	std		70.59	32.02	105.05			750	52.7	900
			.438	11.1		30	82.06	37.22	122.12			900	63.3	1000
			.500	12.7	xs		93.45	42.39	139.07			1000	70.3	1200
			.562	14.3		40	104.76	47.52	155.90			1100	77.3	1300
			.750	19.0		60	138.17	62.67	205.62			1500	105.5	1800
			.938	23.8		80	170.84	77.49	254.24			1900	133.6	2200
			1.156	29.4		100	208.00	94.35	309.54			2300	161.7	2700
			1.375	34.9		120	244.14	110.74	363.32			2800	196.9	2800
			1.562	39.7		140	274.30	124.42	408.20			2800	196.9	2800
20	20.000	508.0	1.781	45.2		160	308.55	139.96	459.17			2800	196.9	2800
			.250	6.4		10	52.73	23.92	78.47			450	31.6	500
			.375	9.5	std	20	18.60	35.65	116.97			700	49.2	800
			.500	12.7	xs.	30	104.13	47.23	154.97			900	63.3	1000
			.594	15.1		40	123.06	55.82	183.13			1100	77.3	1200
			.812	20.6		60	166.50	75.52	247.78			1500	105.5	1700
			1.031	26.2		80	208.92	94.76	310.91			1900	133.6	2200
			1.281	32.5		100	256.15	116.19	381.19			2300	161.7	2700
			1.500	38.1		120	296.37	134.43	441.05			2700	189.8	2800
			1.750	44.4		140	341.10	154.72	507.61			2800	196.9	2800
			1.969	50.0		160	379.14	171.98	564.22			2800	196.9	2800
24	24.000	609.6	.250	6.4		10	63.41	28.76	94.36			400	28.1	450
			.375	9.5	std	20	94.62	42.92	140.81			550	38.7	650
			.500	12.7	xs.		125.49	56.92	186.75			750	52.7	900
			.562	14.3		30	140.80	63.87	209.53			850	59.8	1000
			.688	17.5		40	171.17	77.64	254.73			1000	70.3	1200
			.938	23.8			230.92	104.74	343.65				105.5	
			.969	24.6		60	238.29	108.09	354.61			1500	126.6	1700
			1.219	31.0		90	296.53	134.50	441.28			1800	161.7	2100
			1.531	38.9		100	367.45	166.67	546.82			2300	189.8	2700
			1.812	46.0		120	429.50	194.82	639.16			2700	196.9	2800
			2.062	52.4		140	483.24	219.19	719.14			2800	196.9	2800
			2.344	59.5		160	542.09	245.89	806.72			2800	196.9	2800

PPF ERW PIPES

Black/ Galvanized Carbon Steel Pipes to standards BS 1387


Class	Nominal size		Outside diameter				Wall Thickness		Mass Of Black Tube					
			Max		Min				Plain Ends			Threads & Coupling		
	inch	mm	inch	mm	inch	mm	inch	mm	Kg/m	Kg/ft	lb/ft	Kg/m	Kg/ft	lb/ft
L I G H T	1/2	15	0.843	21.4	0.827	21.0	0.079	2.0	0.947	0.289	0.636	0.956	0.291	0.642
	3/4	20	1.059	26.9	1.039	26.4	0.091	2.3	1.38	0.421	0.927	1.390	0.424	0.934
	1.00	25	1.331	33.8	1.307	33.2	0.102	2.6	1.98	0.603	1.331	2.000	0.610	1.344
	1.25	32	1.673	42.5	1.650	41.9	0.102	2.6	2.54	0.774	1.707	2.570	0.783	1.727
	1.50	40	1.906	48.4	1.882	47.8	0.114	2.9	3.23	0.984	2.171	3.270	0.997	2.198
	2.00	50	2.370	60.2	2.346	59.6	0.114	2.9	4.08	1.244	2.742	4.150	1.265	2.789
	2.50	65	2.992	76.0	2.961	75.2	0.126	3.2	5.71	1.740	3.837	5.830	1.777	3.918
	3.00	80	3.492	88.7	3.461	87.9	0.126	3.2	6.72	2.048	4.516	6.890	2.100	4.630
	4.00	100	4.484	113.9	4.449	113.0	0.142	3.6	9.75	2.972	6.552	10.000	3.048	6.721
M E D I U M	1/2	15	0.854	21.7	0.831	21.1	0.102	2.6	1.21	0.369	0.813	1.220	0.372	0.820
	3/4	20	1.071	27.2	1.047	26.6	0.102	2.6	1.56	0.475	1.048	1.570	0.479	1.055
	1.00	25	1.346	34.2	1.315	33.4	0.126	3.2	2.41	0.735	1.620	2.430	0.741	1.633
	1.25	32	1.689	42.9	1.657	42.1	0.126	3.2	3.10	0.945	2.083	3.130	0.954	2.104
	1.50	40	1.921	48.8	1.890	48.0	0.126	3.2	3.57	1.088	2.399	3.610	1.100	2.426
	2.00	50	2.394	60.8	2.354	59.8	0.142	3.6	5.03	1.533	3.380	5.100	1.554	3.427
	2.50	65	3.016	76.6	2.969	75.4	0.142	3.6	6.43	1.963	4.328	6.550	1.996	4.402
	3.00	80	3.524	89.5	3.469	88.1	0.157	4.0	8.37	2.551	5.625	8.540	2.603	5.739
	4.00	100	4.524	114.9	4.461	113.3	0.177	4.5	12.20	3.718	8.199	12.500	3.810	8.401
	5.00	125	5.535	140.6	5.461	138.7	0.197	5.0	16.60	5.095	11.156	17.100	5.212	11.492
	6.00	150	6.539	166.1	6.461	164.1	0.197	5.0	19.70	6.004	13.239	20.300	6.187	13.643
H E A V Y	1/2	15	0.854	21.7	0.831	21.1	0.126	3.2	1.44	0.439	0.968	1.450	0.442	0.974
	3/4	20	1.071	27.2	1.047	26.6	0.126	3.2	1.87	0.570	1.257	1.880	0.573	1.263
	1.00	25	1.346	34.2	1.315	33.4	0.157	4.0	2.94	0.896	1.976	2.960	0.902	1.989
	1.25	32	1.689	42.9	1.657	42.1	0.157	4.0	3.80	1.158	2.554	3.830	1.167	2.574
	1.50	40	1.921	48.8	1.890	48.0	0.157	4.0	4.38	1.335	2.944	4.420	1.347	2.970
	2.00	50	2.394	60.8	2.354	59.8	0.177	4.5	6.19	1.887	4.160	6.260	1.908	4.207
	2.50	65	3.016	76.6	2.969	75.4	0.177	4.5	7.93	2.417	5.329	8.050	2.454	5.410
	3.00	80	3.524	89.5	3.469	88.1	0.197	5.0	10.30	3.139	6.922	10.500	3.200	7.057
	4.00	100	4.524	114.9	4.461	113.3	0.213	5.4	14.50	4.419	9.745	14.800	4.511	9.946
	5.00	125	5.535	140.6	5.461	138.7	0.213	5.4	17.90	5.456	12.030	18.400	5.608	12.366
	6.00	150	6.539	166.1	6.461	164.1	0.213	5.4	21.30	6.492	14.315	21.900	6.675	14.718

Wall thickness tolerances:



LIGHT TUBES : +/-8%

MEDIUM & HEAVY TUBES : +/-10%

All pipe threads conform to BS 1387

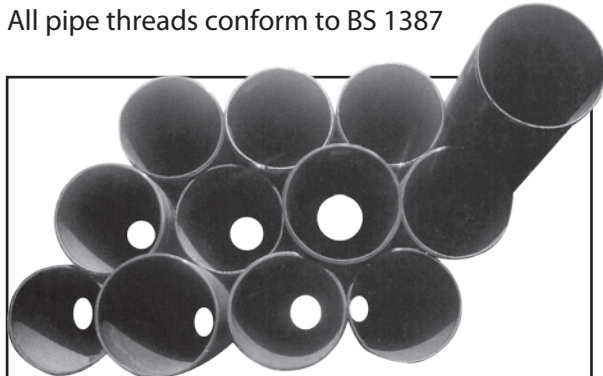

MANUFACTURING DIAGRAM

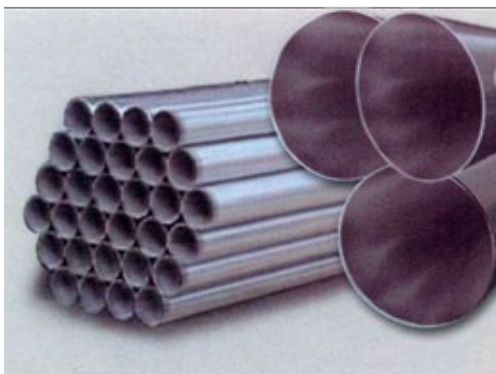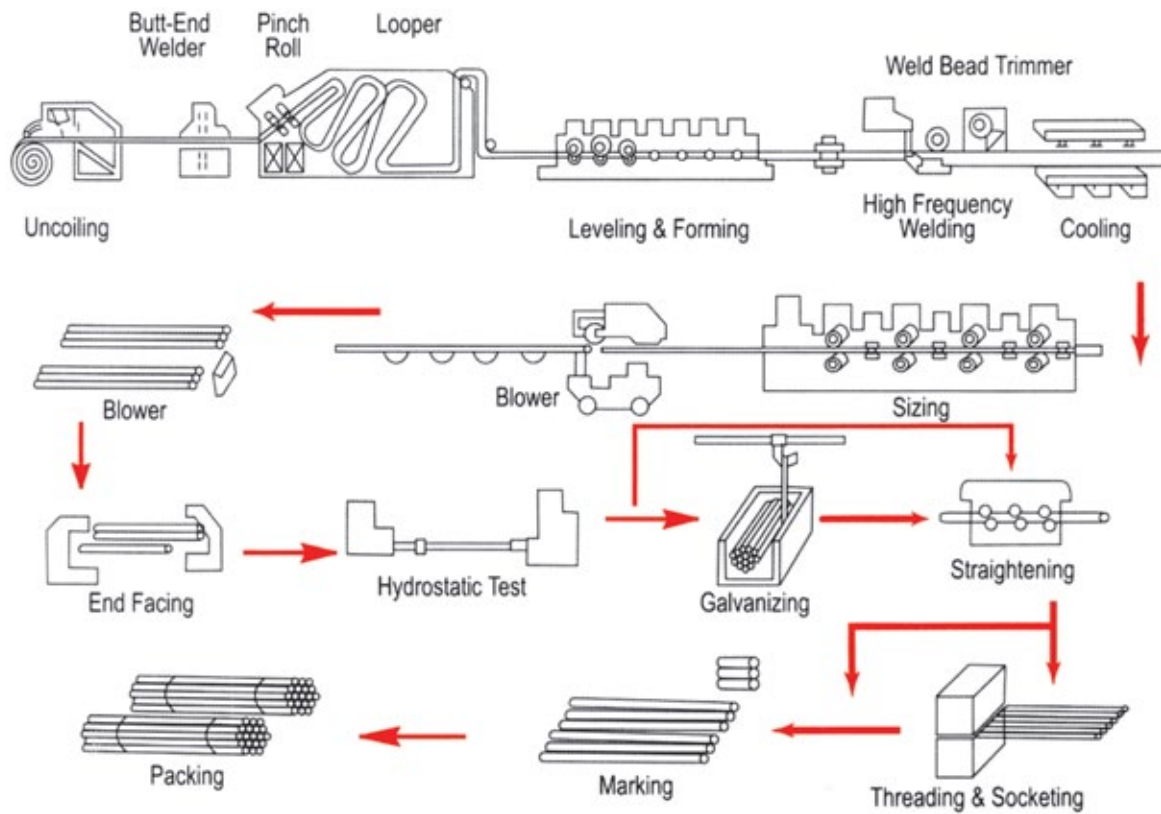


Spiral submerged arc -welded steel pipe API 5L specifications


Nominal Pipe	OD	Schedule		Standard	Schedule		Schedule		Extra Strong	Schedule			
		30			40		60			80			
size mm	size inch	Wall mm	Wt Kg/m	Wall mm	Wt Kg/m	Wall mm	Wt Kg/m	Wall mm	Wt Kg/m	Wall mm	Wt Kg/m	Wall mm	Wt Kg/m
6	10.3			1.7	0.357	1.7	0.357			2.4	0.47	2.4	0.47
8	13.7			2.2	0.625	2.2	0.625			3	0.804	3	0.804
10	17.1			2.3	0.848	2.3	0.848			3.2	1.1	3.2	1.1
15	21.3			2.8	1.26	2.8	1.26			3.7	1.62	3.7	1.62
20	26.7			2.9	1.68	2.9	1.68			3.9	2.19	3.9	2.19
25	33.4			3.4	2.5	3.4	2.5			4.5	3.23	4.5	3.23
32	42.2			3.6	3.38	3.6	3.38			4.9	4.46	4.9	4.46
40	48.3			3.7	4.05	3.7	4.05			5.1	5.4	5.1	5.4
50	60.3			3.9	5.43	3.9	5.43			5.5	7.47	5.5	7.47
65	73.0			5.2	8.62	5.2	8.62			7.0	11.4	7.0	11.4
80	88.9			5.5	11.3	5.5	11.3			7.6	15.3	7.6	15.3
80	101.6			5.7	13.6	5.7	13.6			8.1	18.6	8.1	18.6
100	114.3			6	16.1	6	16.6			8.6	22.3	8.6	22.3
125	141.3			6.6	21.8	6.6	21.8			9.5	30.9	9.5	30.9
150	168.3			7.1	28.2	7.1	28.2			11	42.5	11	42.5
200	219.1	7.0	36.7	8.2	42.5	8.2	42.5	10.3	53.1	12.7	64.6	12.7	64.6
250	223.0	7.8	50.9	9.3	60.2	9.3	60.2	12.7	81.5	12.7	81.5	15.1	95.8
300	323.9	8.4	65.1	9.5	73.8	10.3	79.7	14.3	109	12.7	97.4	17.4	132
350	355.6	9.5	81.2	9.5	812	11.1	94.3	15.1	126.5	12.7	107.3	19	158
400	406.4	9.5	93.1	9.5	93.1	12.7	0.123	16.7	160	12.7	123	21.4	203.3
450	457.2	11.1	0.122	9.5	105	14.3	0.156	19	206	12.7	139	23.8	254
500	508.0	12.7	0.155	9.5	117	15.1	0.183	20.6	248	12.7	155	26.2	311
550	558.8	12.7	0.171	9.5	129			22.2	294	12.7	171	28.6	373
600	609.6	14.3	0.210	9.5	141	17.4	0.255	24.6	355	12.7	187	30.9	441
650	660.4			9.5	153					12.7	203		
700	711.2			9.5	165					12.7	219		
750	762.0			9.5	176					12.7	234		
800	812.8			9.5	108					12.7	250		
900	914.4			9.5	212					12.7	286		
1000	1016.00	15.9		9.5	236					12.7	314		




Structure of a conventional Spiral Pipe Welding Machine

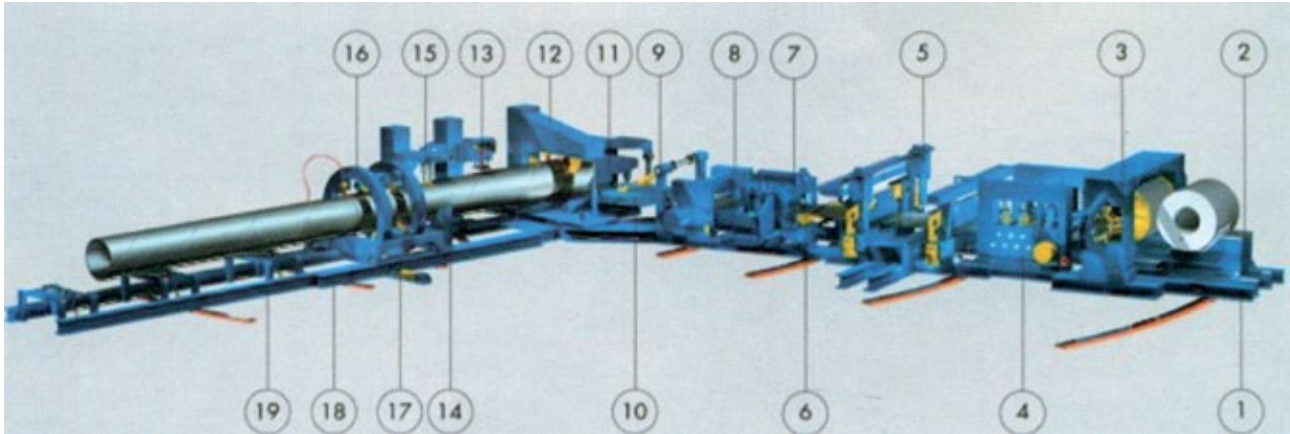

- | | |
|--|--|
| 1 Machine base frame | 11 Three - roller bending system |
| 2 Coil transport carriage | 12 Multi roller guide cage |
| 3 Decoiling stand | 13 Submerged - arc outside welding installation |
| 4 Strip straightening machine | 14 Control steady rest |
| 5 Strip cross seam welding device | 15 Ultrasonic control device |
| 6 Strip side guide | 16 Pipe cutting carriage |
| 7 Strip edge trimming - milling device | 17 Electrical / hydraulic welding gap control system |
| 8 Main driver stand | 18 Base frame |
| 9 Strip edge pre - bending unit | 19 Pipe lowering device |
| 10 Strip guide table | |

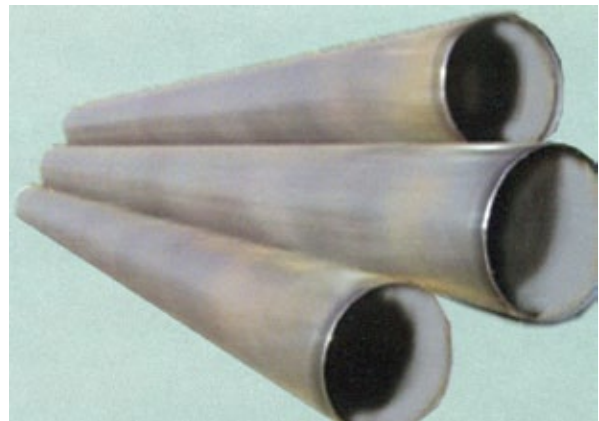

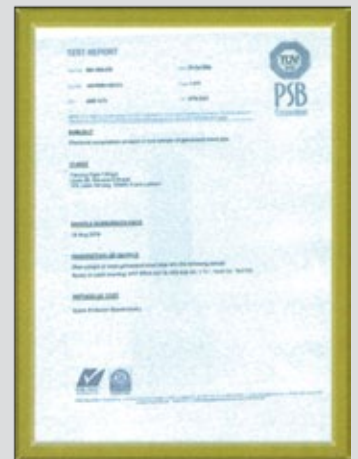

Our production starts with careful sourcing of raw materials and supplies. State of the Art technologies and machines are introduced into the production process. Highly strict quality controls are implemented on every step of production to ensure the product quality delivering to the market. Through years of hard work and continuing improvement of quality.



STANDARDS

DIN (Deutsches Institute for Normung)

DIN16151 Welded Circular Unalloyed Steel Tubes Not Subject To Special Requirements
DIN16261 Welded Circular Tubes of Non Alloy Steels with Special Quality Requirements
DIN23941 Welded And Sized Precision Steel Tubes
DIN23951 Rectangular and Square Electric Welded Precision Steel Tubes
DIN2403 Marking of pipes according to fluid transported
DIN24401 Steel Tubes Medium Weight Suitable For Screwing
DIN24411 Steel Tubes Heavy Weight for Suitable For Screwing
DIN24441 Zinc Coating on Steel Tubes
DIN24581 Welded Steel Pipes and Tubes
DIN2460 1 Steel Pipes for Water Pipelines
DIN171201 Welded Circular Steel Tubes for Structural Steelwork

BS (British Standards)

BS534 / Steel Pipes Fittings and Specials for Water and Gas and Sewage
BS1139 / Tubes for Use in Scaffolding
BS1387 / Steel Tubes and Tubulars Suitable for Screwing to BS21 Pipe Threads
BS36001 Dimensions and Masses Per Unit Length of Welded and Seamless Steel Pipes
BS6011 Steel Pipes and Tubes for Pressure Purposes Carbon Steel with Specified Room
BS3602 1 Steel Pipes and Tubes for Pressure Purposes: Carbon and Carbon Manganese
BS3603 1 Steel Pipes and Tubes for Pressure Purposes Carbon and Alloy Steel
BS3606 1 Steel Tubes for Heat Exchangers

ASTM INTERNATIONAL

ASTM A 53 / ASME SA53/ Pipe Steel Black and Hot Dipped Zinc Coated Welded and Seamless
ASTM A 134 / ASME SA 134 / Pipe Steel Electric Fusion (ARC) Welded (Sizes Nps 16 and Over)
ASTM A 135 / ASME SA 1235/ Pipe Steel Electric Fusion (ARC) Welded
ASTM A 139 / ASME SA 139/Electric Resistance Welded Steel Pipe
ASTM A 178 / ASME SA 178 / Electric Resistance Welded Carbon Steel Boiler Tubes
ASTM A211 / ASME SA211 / Spiral Welded Steel or Iron Pipe
ASTM A214 / ASME SA214 / Electric Resistance Welded Carbon Steel Heat Exchanger and Condenser Tubes
ASTM A216 / ASME SA216 / Carbon Steel Castings Suitable for Fusion for High Temperature Service
ASTM A226 / ASME SA226 / Electric Resistance Welded Carbon Steel Boiler and Superheater Tubes
ASTM A252 / ASME SA252 / Welded and Seamless Steel Pipe Piles
ASTM A333 / ASME SA333 / Seamless and Welded Steel Pipe for Low Temperature Service
ASTM A334 / ASME SA334 / Seamless and Welded Carbon and Alloy Steel Tubes for Low Temperature Service
ASTM A369 / ASME SA369 / Carbon and Ferritic Alloy Steel Forged and Bored Pipe for High Temperature Service
ASTM A381 / ASME SA381 / Metal Arc Welded Steel Pipe for USE with High Pressure Transmission Systems



PAHANG PIPE FITTINGS

Level 36, Menara Citibank,
165, Jalan Ampang, 50450 Kuala Lumpur
Tel: (603) 2169817, Facsimile: (603)21784969
E-Mail: sales@pahangpf.com
Web site: www.pahangpf.com